

Series 225 Movable Wall System

PRODUCT



Aesthetically pleasing yet functional and affordable. Series 225 components are the solution for 99% of your interior work environments.

Series 225

This 2¼" tongue-and-groove unitized panel system is our most cost-efficient solution, designed for any interior.


- 24" wide, 5/8" Type X USG gypsum panels, manufactured at heights up to 12'
- Precision laminated and pre-finished with vinyl, fabric, or even custom materials
- Incorporates full-height glass, chair rail, clerestory, glass sidelights, pass-through openings, and hinged and sliding doors
- STC rating of 37
- Class A fire rating



Glass walls allow exterior light in while protecting privacy. Cherry veneer panels match the solid wood door.



Options include Fusion Architectural Panels for environmental design with a decorative touch.

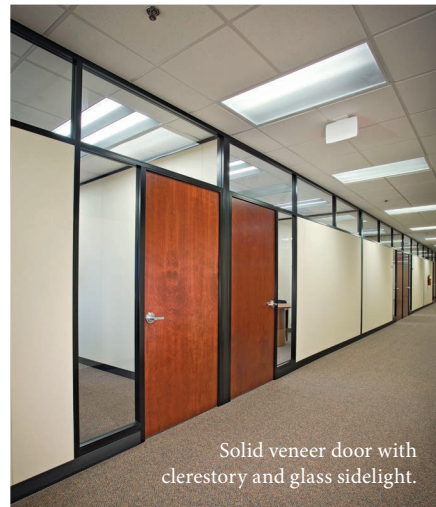

Solid veneer door with clerestory and glass sidelight.



Brighten up interior walls with a variety of fabric or vinyl wall coverings.

Series 225 Movable Wall System	The Series 225 movable wall system is a product that easily adapts to a myriad of design and functional requirements of the owner, architect, and designer. It is an ideal choice for the corporate or general office setting.
Unitized Panel Design	All gypsum 2¼” (57mm) tongue-and-groove panel, pre-finished, and precision laminated up to 12’.
Wire Management	Wiring for power, telecommunications and data can be accommodated both horizontally and vertically.
Flexibility	Door, glass, and other systems can be located at any point along the wall. Face panels can be field modified to adapt to building architecture, design changes, and floor-to-ceiling heights. The product is 90-100% reusable.
Finish Selection	Standard finishes for the face panels include fabric or vinyl coverings. Finishes for aluminum trims and components include standard paint and satin anodized. Custom finishes available. Call E2 Walls customer service for samples.
FEATURES	COMPONENTS
Wall Thickness 2¼” (57 mm)	CEILING TRACK Extruded Aluminum — 2½” (64 mm) with 1½” (38 mm) profile. Satin anodized or standard paint finishes.
Unitized Panel Cavity 1” x 12” (25 mm x 305 mm)	GYPSUM PANEL 2 each ⅝” x 24” (16 mm x 610 mm) Type X USG, Fire code, beveled-edge face panels laminated to (2) each 1” x 6” (25 mm x 152 mm) gypsum studs.
STC 37	FLOOR TRACK Extruded Aluminum — 2½” (64 mm) width, ¾” (19 mm) Flange with optional ¼” (6 mm) carpet teeth.
Fire Ratings Class A	FLOOR BASE 4” (102mm) Extruded vinyl snap-on base. Standard colors available.
Flame Spread/Smoke Developments Class A (Vinyl)	VERTICAL COMPONENTS Extruded Aluminum with satin anodized or standard paint finishes.
	DOOR FRAMES Extruded Aluminum — Full height or mitered door frames. Satin anodized or standard paint finishes.
	DOORS & HARDWARE Choose from hinged or sliding door products in aluminum, hardwood, paint grade, or plastic laminate, including prefinished architectural doors. Glass inserts available. Door hardware to match building standard or as specified.
Notes: For detailed technical drawings, specifications, and assembling information, contact E2 Walls customer service.	GLASS & GLAZING Extruded Aluminum components engineered for ¼”, ⅜”, or ½” tempered glass. Satin anodized or standard paint finishes. Overhead bracing and support for architectural butt joint glass to be engineered and constructed by others. All glass supplied by E2 Walls shall be tempered glass and each piece will display the required label.



Permanent Walls That Move®

5692 West Crenshaw Street • Tampa, FL 33634

Office: (813) 374-2010 • Fax: (813) 374-2006

Toll Free: (888) 816-9816 • Email: info@e2walls.com

Lic. CGC-1528644

www.e2walls.com

© 2020 E2 Walls, Inc. Tampa, FL.

All Rights Reserved. Printed in the U.S.A.